

## WRGU型

## 公稱型獄的構成

WRGU 3 130


1 2 3

1 型獄 2 滾柱尺寸 3 滑臺長度

※ 尺寸檯之外的規格及型獄請向本公司諮詢



公稱型獄	主要尺寸					臺面尺寸														
	最大行程	寬 W	寬允許公差	高 M ±0.1	寬 L	質量 (kg)	臺面螺絲位置				側面附着螺絲攻位置									
							B	n×F	G	S	n <sub>1</sub> ×F <sub>1</sub>	G <sub>1</sub>	G <sub>2</sub>	b <sub>1</sub>	t <sub>1</sub>	S <sub>1</sub> ×ℓ				
WRGU 1025	12				25	0.08		—				1×10		2.5						
WRGU 1035	18				35	0.11		1×10				2×10		4.5						
WRGU 1045	25				45	0.15		2×10				3×10		6						
WRGU 1055	32	30	-0.2 -0.4	17	55	0.18	10	3×10	12.5	M2		4×10	7.5	7.5	12	2.5			M2×4	
WRGU 1065	40				65	0.21		4×10				5×10		8.5						
WRGU 1075	45				75	0.24		5×10				6×10		11						
WRGU 1085	50				85	0.27		6×10				7×10		13.5						
WRGU 2035	18				35	0.2		—				1×15		3						
WRGU 2050	30				50	0.26		1×15				2×15		4.5						
WRGU 2065	40				65	0.34		2×15				3×15		7						
WRGU 2080	50	40	-0.2 -0.4	21	80	0.42	15	3×15	17.5	M3		4×15	10	9.5	16	3.4			M2×4	
WRGU 2095	60				95	0.5		4×15				5×15		12						
WRGU 2110	70				110	0.58		5×15				6×15		14.5						
WRGU 2125	80				125	0.66		6×15				7×15		17						
WRGU 3055	30				55	0.57		—				1×25		5.5						
WRGU 3080	45				80	0.8		1×25				2×25		10.5						
WRGU 3105	60				105	1.03		2×25				3×25		15.5						
WRGU 3130	75	60	±0.1	28	130	1.26	25	3×25	27.5	M4		4×25	15	20.5	40	5.5			M3×6	
WRGU 3155	90				155	1.49		4×25				5×25		25.5						
WRGU 3180	105				180	1.72		5×25				6×25		30.5						
WRGU 3205	130				205	1.95		6×25				7×25		30.5						

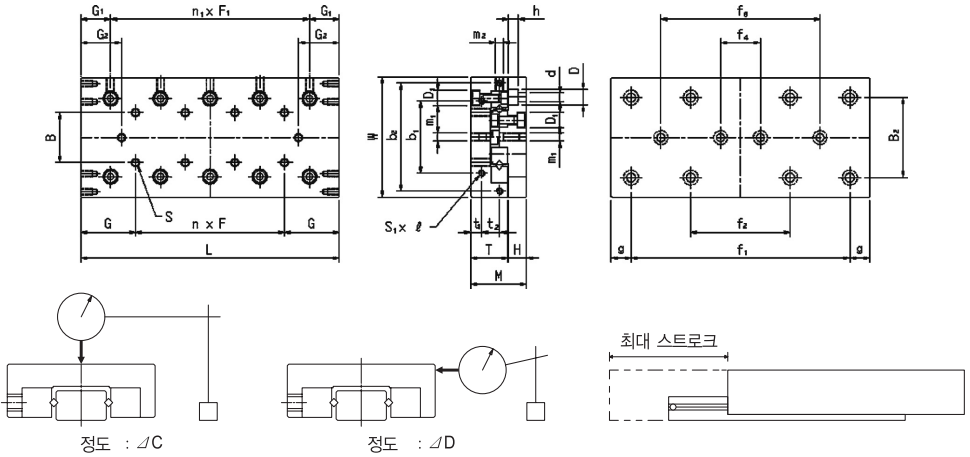

單位 : mm

側面尺寸							培司面尺寸附着孔位置				基本額定負荷		精度 μm		公稱型號
T	H	d×D×h	D1	m1	m2	B2	f1	f2	f3	g	動 C (kN)	靜 Co (kN)	ΔC	ΔD	
11	5.5	2.55×4.1×2.5	4.1	M2	M2	22	18	-	-	3.5	0.46	0.61	2	4	WRGU 1025
							28	-	-		0.63	0.92	2	4	WRGU 1035
							38	-	-		0.95	1.53	2	4	WRGU 1045
							48	28	-		1.09	1.84	2	5	WRGU 1055
							58	38	-		1.23	2.14	2	5	WRGU 1065
							68	48	-		1.50	2.75	2	5	WRGU 1075
							78	58	-		1.63	3.06	2	5	WRGU 1085
14	6.4	3.5×6×3.5	6.0	M3	M3	30	25	-	-	5	0.46	1.08	2	4	WRGU 2035
							40	-	-		0.64	1.63	2	4	WRGU 2050
							55	-	-		0.81	2.17	2	5	WRGU 2065
							70	40	-		1.11	3.25	2	5	WRGU 2080
							85	55	-		1.25	3.79	2	5	WRGU 2095
							100	70	-		1.39	4.34	3	6	WRGU 2110
18.5	9	4.5×7.5×5	7.5	M4	M4	40	35	-	-	10	2.71	3.67	2	5	WRGU 3055
							60	-	-		4.06	6.11	2	5	WRGU 3080
							85	-	-		4.68	7.33	3	6	WRGU 3105
							110	-	-		5.86	9.78	3	6	WRGU 3130
							135	-	85		6.98	12.2	3	6	WRGU 3155
							160	-	110		8.05	14.7	3	7	WRGU 3180
							185	85	135		8.57	15.9	3	7	WRGU 3205

1N ≒ 0.102kgf

## WRGU型

## 公稱型號的構成

WRGU 4 125

1

2





3

1 型號 2 滾柱尺寸 3 滑臺長度


※ 尺寸碼之外的規格及型號請向本公司諮詢




公稱型號	主要尺寸				臺面尺寸																													
	最大行程	寬 W ±0.1	高 M ±0.1	寬 L	質量 (kg)	臺面螺絲位置				側面附着螺絲攻位置																								
						B	n×F	G	S	n₁×F₁	G₁	G₂	b₁	b₂	t₁	t₂	S×ℓ																	
WRGU 4085	50			85	1.5		-			1×40	10.5																							
WRGU 4125	75			125	2.3		1×40			2×40	18.0																							
WRGU 4165	105	80	35	165	3.1	40	2×40	42.5	M5	3×40	22.5	55	-	6.5	-	M3×6																		
WRGU 4205	130			205	3.8		3×40			4×40							30.5																	
WRGU 4245	155			245	4.6		4×40			5×40							38.5																	
WRGU 4285	185			485	5.3		5×40			6×40							43.0																	
WRGU 6110	60						110			3.2								-			1×50	16.0												
WRGU 6160	95						160			4.6								1×50			2×50	23.5												
WRGU 6210	130			210	6.0		2×50			3×50	31.0																							
WRGU 6260	165	100	45	260	7.4	50	3×50	55	M6	4×50	30.0	38.5	60	92	8	15	M4×8																	
WRGU 6310	200			310	8.7		4×50			5×50								46.0																
WRGU 6360	235			360	10.1		5×50			6×50								53.5																
WRGU 6410	265			410	11.5		6×50			7×50								63.5																
WRGU 9210	130						210			12.0									-			-	27.0											
WRGU 9310	180						310			17.6									1×100			1×100	52.0											
WRGU 9410	350			410	23.2		2×100			2×100	17.0																							
WRGU 9510	450			510	28.8		3×100			3×100	17.0																							
WRGU 9610	550	145	60	610	34.4	85	4×100	105	M8	4×100	55.0	17.0	90	135	11	20	M4×8																	
WRGU 9710	650			710	40.0		5×100			5×100								17.0																
WRGU 9810	750			810	45.6		6×100			6×100								17.0																
WRGU 9910	850			910	51.2		7×100			7×100								17.0																
WRGU 91010	950			1010	56.8		8×100			8×100								17.0																



정도 : ∠C



정도 : ∠D



單位 : mm

側面尺寸							培司面尺寸附着孔位置					基本額定負荷		精度 μm		公稱型號
T	H	d×D×h	D1	m1	m2	B2	f1	f2	f3	f4	g	動 C (kN)	靜 Co (kN)	∠C	∠D	
24	10.5	5.5×9.5×6	9.5	M4	M4	60	65	-	-	-	10	5.92	8.10	2	5	WRGU 4085
							80	-	-	-	22.5	8.85	13.5	3	6	WRGU 4125
							120	-	-	-	22.5	11.5	18.9	3	7	WRGU 4165
							160	80	-	-	22.5	14.0	24.3	3	7	WRGU 4205
							200	120	-	-	22.5	16.4	29.7	3	7	WRGU 4245
							240	160	-	-	22.5	18.7	35.1	3	7	WRGU 4285
31	13	7×11×7	11	M5	M5	60	90	-	-	-	10	16.4	22.7	3	6	WRGU 6110
							140	-	-	-	10	20.5	30.2	3	6	WRGU 6160
							190	-	90	-	10	28.2	45.4	3	7	WRGU 6210
							240	-	140	-	10	35.4	60.5	3	7	WRGU 6260
							290	-	190	-	10	38.8	68.0	4	8	WRGU 6310
							340	140	240	-	10	45.4	83.2	4	8	WRGU 6360
							390	190	290	-	10	51.7	98.3	4	8	WRGU 6410
43	16	9×14×9	14	M8	M6	90	100	-	-	-	55	52.3	75.8	3	7	WRGU 9210
							200	-	-	-	55	81.1	133	3	7	WRGU 9310
							300	-	100	-	55	81.1	133	4	8	WRGU 9410
							400	-	200	-	55	98.7	171	4	8	WRGU 9510
							500	100	300	-	55	115	209	4	9	WRGU 9610
							600	200	400	-	55	131	246	4	9	WRGU 9710
							700	300	500	100	55	139	265	5	10	WRGU 9810
							800	400	600	200	55	155	303	5	10	WRGU 9910
							900	500	700	300	55	169	341	5	10	WRGU 91010

1N ≒ 0.102kgf

## WRGU-AC型

## 公稱型獄的構成

WRGU 3 130 AC





1 2 3 4

1 型獄 2 滾柱尺寸 3 滑臺長度 4 防滑


※ 尺寸儻之外的規格及型獄請向本公司諮詢




公稱型獄	主要尺寸					臺面尺寸												
	最大行程	寬 W ±0.1	高 M ±0.1	寬 L	質量 (kg)	臺面螺絲位置				側面附着螺絲攻位置								
						B	n×F	G	S	n <sub>1</sub> ×F <sub>1</sub>	G <sub>1</sub>	G <sub>2</sub>	b <sub>1</sub>	t <sub>1</sub>	S <sub>1</sub> ×ℓ			
WRGU 2035 AC	18			35	0.2		—				1×15		3					
WRGU 2050 AC	30			50	0.26		1×15				2×15		4.5					
WRGU 2065 AC	40			65	0.34		2×15				3×15		7					
WRGU 2080 AC	50	40	21	80	0.42	15	3×15	17.5	M3		4×15	10	9.5	16	3.4		M2×4	
WRGU 2095 AC	60			95	0.5		4×15				5×15		12					
WRGU 2110 AC	70			110	0.58		5×15				6×15		14.5					
WRGU 2125 AC	80			125	0.66		6×15				7×15		17					
WRGU 3055 AC	30			55	0.57		—				1×25		5.5					
WRGU 3080 AC	45			80	0.8		1×25				2×25		10.5					
WRGU 3105 AC	60			105	1.03		2×25				3×25		15.5					
WRGU 3130 AC	75	60	28	130	1.26	25	3×25	27.5	M4		4×25	15	20.5	40	5.5		M3×6	
WRGU 3155 AC	90			155	1.49		4×25				5×25		25.5					
WRGU 3180 AC	105			180	1.72		5×25				6×25		30.5					
WRGU 3205 AC	130			205	1.95		6×25				7×25		30.5					
WRGU 4085 AC	50			85	1.5		—				1×40		10.5					
WRGU 4125 AC	75			125	2.3		1×40				2×40		18.0					
WRGU 4165 AC	105			165	3.1		2×40				3×40		23.0					
WRGU 4205 AC	130	80	35	205	3.8	40	3×40	42.5	M5		4×40	22.5	30.5	55	6.5		M3×6	
WRGU 4245 AC	155			245	4.6		4×40				5×40		38.5					
WRGU 4285 AC	185			485	5.3		5×40a				6×40		43.0					



정도 : ΔC



정도 : ΔD



單位 : mm

側面尺寸						培司面尺寸 附着孔位置					基本額定負荷		精度 μm		公稱型號
T	H	d×D×h	D1	m1	m2	B2	f1	f2	f3	g	動 C (kN)	靜 Co (kN)	ΔC	ΔD	
14	6.4	3.5×6×3.5	6.0	M3	M3	30	25	-	-	5	0.46	1.08	2	4	WRGU 2035 AC
							40	-	-		0.64	1.63	2	4	WRGU 2050 AC
							55	-	-		0.81	2.17	2	5	WRGU 2065 AC
							70	40	-		1.11	3.25	2	5	WRGU 2080 AC
							85	55	-		1.25	3.79	2	5	WRGU 2095 AC
							100	70	-		1.39	4.34	3	6	WRGU 2110 AC
18.5	9	4.5×7.5×5	7.5	M4	M4	40	35	-	-	10	2.71	3.67	2	5	WRGU 3055 AC
							60	-	-		4.06	6.11	2	5	WRGU 3080 AC
							85	-	-		4.68	7.33	3	6	WRGU 3105 AC
							110	-	-		5.86	9.78	3	6	WRGU 3130 AC
							135	-	85		6.98	12.2	3	6	WRGU 3155 AC
							160	-	110		8.05	14.7	3	7	WRGU 3180 AC
24	10.5	5.5×9.5×6	9.5	M4	M4	60	65	-	-	22.5	5.92	8.10	2	5	WRGU 4085 AC
							80	-	-		8.85	13.5	3	6	WRGU 4125 AC
							120	-	-		11.5	18.9	3	7	WRGU 4165 AC
							160	80	-		14.0	24.3	3	7	WRGU 4205 AC
							200	120	-		16.4	29.7	3	7	WRGU 4245 AC
							240	160	-		18.7	35.1	3	7	WRGU 4285 AC

1N ≙ 0.102kgf